




TORNADO

The King of Rainheads

MANUFACTURED IN AUSTRALIA FROM U/V TREATED 4MM POLYPROPYLENE - VIRTUALLY INDESTRUCTABLE



TORNADO Micro, 100 and 150.
Suitable for installation in any box guttering system installations.

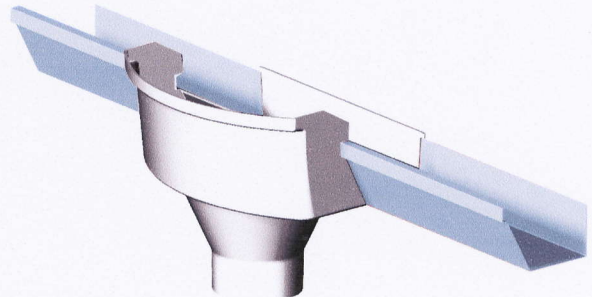

TORNADO Inline.
Suitable for installation in any domestic or industrial guttering system installations.

<u>PRODUCTS</u>	FLOW RATES (ltr/sec)	FLOW RATES (ltr/min)
Tornado Micro	13.50	810
Tornado 100	15.23	913
Tornado 150	35.10	2130
Tornado Inline	19.12	1147

The above flow rates are based on actual tests done under strict NATA specifications and guidelines.

Phone: +61 8 962 1022
Fax: +61 8 9362 1044
E-mail: enquiries@tornadorainhead.com



TORNADO
KING of
RAINHEADS